

Line Interactive UPS

The Most Reliable With Automatic Voltage Regulation

Application:

- ★ Home & Home Office
- ★ Small Office
- ★ Personal Computer



Features:

- ★ Overload Protection
- ★ EMI, RFI, Surge and Spike Protection
- ★ Phone/ Fax/ Modem/ DSL / Network Protection (Optional)
- ★ USB Connectivity Port (Optional)
- ★ LED Status Indicator
- ★ Fire- resistant Capability
- ★ Battery Management Technology
- ★ Compact Size
- ★ Excellent Microprocessor Control guarantees High reliability
- ★ Boost and Buck AVR For Voltage Stabilization
- ★ Auto Restart While A C is recovering
- ★ Off- Mode Charging
- ★ Cold Start Function





Technical Specifications

Modal	HTECH 600VA LI	HTECH 800VA LIE	HTECH 1KVA LI	HTECH 2KVA LI
Capacity	600VA/360W	800VA/480W	1KVA/600W	2KVA/1200W

Input

Voltage 230V AC

Voltage Rang 150VAC - 290VAC

Frequency 50/60 Hz

Output

Voltage 230VAC

AC Voltage Regulation 230VAC +/- 10%

Frequency 50Hz or 60Hz +/- 1Hz

Transfer Time Typical 4-10 ms

Waveform (Batt. Mode) Simulated, Modified Sine Wave

Battery Voltage	12VDC	12VDC/24VDC	12VDC/24VDC	24VDC
-----------------	-------	-------------	-------------	-------

Battery VAH	up to 400VAH	up to 1200VAH	up to 1200VAH	up to 1200VAH
-------------	--------------	---------------	---------------	---------------

Typical Recharge Time 4-6 Hourse recover to 90%

Indicator & Alarms AC Mode, Batt. Mode, Fault, Battery Low, Overload

Protection Overload, Low Battery cutoff, discharge and overcharge, No Load shutdown

Humidity 0 to 90% RH @ 0 to 40 deg C (Non Condensing)

Noise Level Less than 40dB

Other Product Line: Online UPS, Home UPS Systems, Stabilizers and entire range of Solar products



H-Tech Power System



Plot. No. A-42, Mahadev Nagar naya Khera,
Vidhyadhar Nagar, Jaipur- 302039




sales@htechpower.in



www.htechpower.in



+91 8107186770

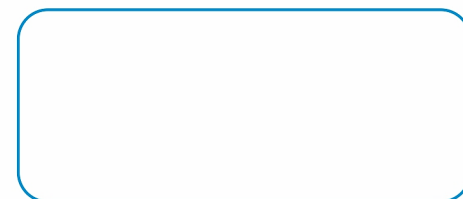

Due to Continuous research and development all specifications mentioned in this brochure are subject to change without notice